D60-10, D65-16, D65-20

High Pressure Reciprocating Piston Pumps

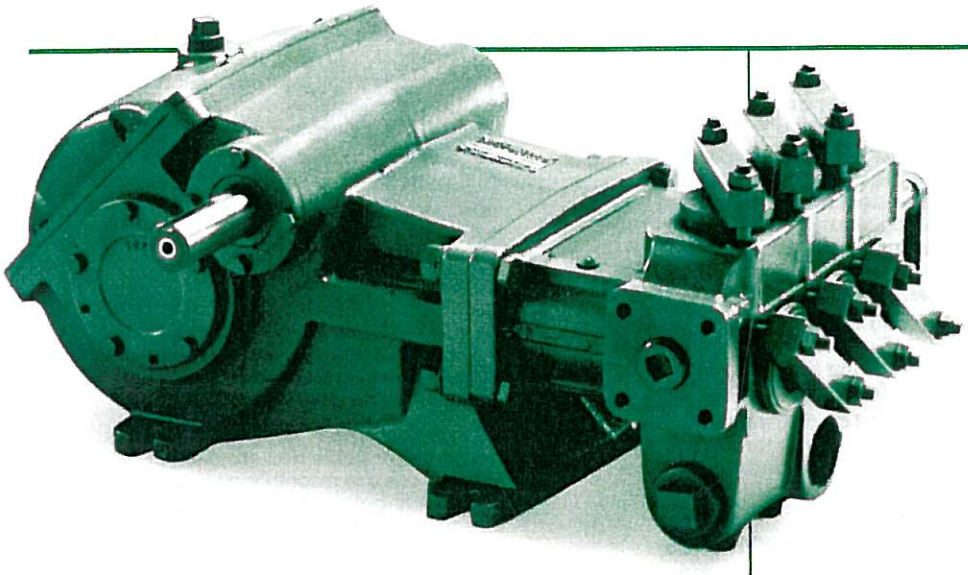

Over a century of experience has proven one thing: Myers designs and builds pumps you can rely on. The proof is in performance. And Myers' D Series high pressure reciprocating pumps perform under pressure for a long time.

The D Series combines Myers' manufacturing expertise and understanding of applications to provide a pump that is perfect for every high pressure job. At Myers, we know what you need and we deliver.

Myers
WHERE INNOVATION MEETS TRADITION.

D60-10 Triplex

Designed for industrial, oil and gas field, mining, and marine applications, this pump's slow crankshaft speed reduces parts wear and energy use. Valve and piston assemblies are easily serviced through front/top openings. Specially effective for hull cleaning, barnacle removal, high pressure cleaning and sealing.

D65-16 Triplex

This pump's large 65 GPM volume of flow at up to 1600 PSI makes it perfect for sewer blasting as well as extra heavy duty industrial and marine cleaning. The compact, powerful design is also right for strata loosening, long distance pumping in coal mines and oil fields, and large vehicle cleaning.

D65-20 Triplex

This is a high-volume, high-pressure piston pump. Can't be beat for hydraulic blasting and cleaning, sewer cleaning, fire truck, injection, hydrostatic testing. Built rugged for continuous, dependable service in many exacting industrial high pressure applications.

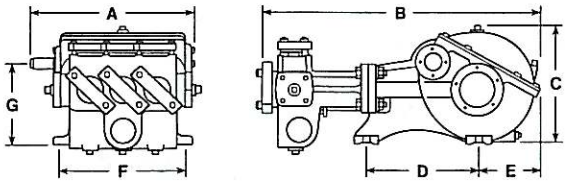

SPECIFICATIONS

Catalog number	Maximum Rated Pressure PSI (BAR)	Maximum Rated Capacity GPM (LPM)	Gear Reduction Ratio	Temperature Rating °F (°C)	Size in Inches (Millimeters)						Weight Lbs. (Kg)	Dimensions in Inches (Millimeters)							Diameter of Mounting Hole
					Cylinder Bore	Piston Stroke	Suction Size (NPT)	Discharge Size (NPT)	Input Shaft	Keyway		A	B	C	D	E	F	G	
D60-10 Triplex	1000 69	60 227.12	3.95 to 1	140 60	2.500 63.50	3.750 95.25	3 76.20	1 1/4 31.75	1 5/8 41.3	3/8 × 3/16 9.53 × 4.76	525 238	21 533.4	34.5 876.3	17 431.8	14 355.6	7.5 190.5	16 406.4	10.38 263.65	.75 19.05
D65-16 Triplex	1600 110	65 246.05	3.95 to 1	180 82	2.125 53.98	3.750 95.25	3 76.20	1 1/4 31.75	1 5/8 41.3	3/8 × 3/16 9.53 × 4.76	525 238	21 533.4	36.25 920.75	17 431.8	14 355.6	7.5 190.5	16 406.4	10.38 263.65	.75 19.05
D65-20 Triplex	2000 138	65 246.05	3.95 to 1	180 82	2.000 50.80	3.750 95.25	3 76.20	1 1/4 31.75	1 5/8 41.3	3/8 × 3/16 9.53 × 4.76	525 238	21 533.4	36.25 920.75	17 431.8	14 355.6	7.5 190.5	16 406.4	10.38 263.65	.75 19.05

Myers®